




Custom Built Degreasing Machines For Degreasing Animal Skins

The most advanced design from Germany's dry cleaning industry, manufactured to the highest standard with stainless steel throughout, including the base tanks.

Features:

- Three solvent tanks.
- Computer controlled, fully automatic with manual override.
- Models for Perc or Hydrocarbons.
- Carbon absorbing OSHA fan.
- Available with electric or steam heating.
- Fitted with inverter drive as standard.
- Optional "Arctic" solvent cooling system.
- Optional second still and drying heater

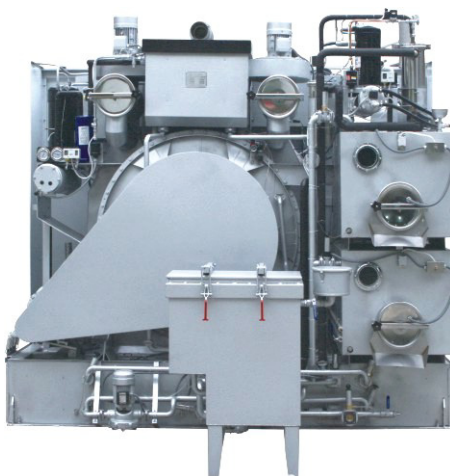



SEVE Degreasing Machines

| | Unit | D11 | D16 | D20 | D25 | D30 | D50 | D80 | D100 |
|---------------------------------|----------------------|----------|----------|----------|----------|----------|----------|----------|----------|
| Capacity | kg | 11 | 16 | 20 | 25 | 30 | 50 | 80 | 100 |
| Volume | L | 220 | 320 | 400 | 500 | 600 | 900 | 1400 | 1800 |
| Washer Speed | rpm | 34 | 34 | 34 | 34 | 34 | 28 | 28 | 28 |
| Extraction Speed | rpm | 370 | 370 | 370 | 370 | 370 | 370 | 370 | 370 |
| Tanks | pcs | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| Machine Dimensions | | | | | | | | | |
| Depth | mm | 1500 | 1550 | 1650 | 1750 | 1750 | 3000 | 3200 | 3400 |
| Width | mm | 1850 | 1950 | 2220 | 2270 | 2350 | 2600 | 2800 | 3000 |
| Height | mm | 2040 | 2200 | 2200 | 2300 | 2350 | 3200 | 2500 | 3500 |
| Weight without Solvent | kg | 950 | 1100 | 1500 | 1700 | 1900 | 3650 | 5000 | 5800 |
| Power Requirement | | | | | | | | | |
| Electric Heated | kw | 13.5 | 15.5 | 15.5 | 18.5 | 25 | N/A | N/A | N/A |
| Supply Connections | | | | | | | | | |
| Compressed Air Flow | m ³ / min | 0.05 | 0.05 | 0.05 | 0.05 | 0.05 | 0.05 | 0.05 | 0.05 |
| Compressed Air Pressure | kg / cm ² | 4 - 5 | 4 - 5 | 4 - 5 | 4 - 5 | 4 - 5 | 4.5 | 4 - 5 | 4 - 5 |
| Compressed Air Fittings | mm | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| Steam Pressure | kg / cm ² | 4 - 6 | 4 - 6 | 4 - 6 | 4 - 6 | 4 - 6 | 4 - 6 | 4 - 6 | 4 - 6 |
| Steam Consumption | kg / hr | 34 | 40 | 44 | 49 | 57 | 75 | 120 | 150 |
| Steam Fittings | inch | 2x1/2" | 2x1/2" | 2x1/2" | 2x1/2" | 2x1/2" | 2x1/2" | 2x1/2" | 2x1/2" |
| Condensate Outlet | inch | 2x1/2" | 2x1/2" | 2x1/2" | 2x1/2" | 2x1/2" | 2x3/4" | 2x3/4" | 2x3/4" |
| Water Consumption | kg / hr | 500 | 580 | 620 | 700 | 950 | 800 | 1100 | 1375 |
| Water Pressure | kg / cm ² | 2 - 3 | 2 - 3 | 2 - 3 | 2 - 3 | 2 - 3 | 2 - 3 | 2 - 3 | 2 - 3 |
| Size of Fittings - Inlet/Outlet | inch | 1 " | 1 " | 1 " | 1 " | 1 " | 1 " | 1 " | 1 " |
| Electrical Requirement | V/Ph/Hz | 380/3/50 | 380/3/50 | 380/3/50 | 380/3/50 | 380/3/50 | 380/3/50 | 380/3/50 | 380/3/50 |

E & OE. Models and specifications subject to change without prior notice.

