




Custom Built Degreasing Machines For Degreasing Animal Skins

The most advanced design from Germany's dry cleaning industry, manufactured to the highest standard with stainless steel throughout, including the base tanks.

Features:

- Three solvent tanks.
- Computer controlled, fully automatic with manual override.
- Models for Perc or Hydrocarbons.
- Carbon absorbing OSHA fan.
- Available with electric or steam heating.
- Fitted with inverter drive as standard.
- Optional "Arctic" solvent cooling system.
- Optional second still and drying heater

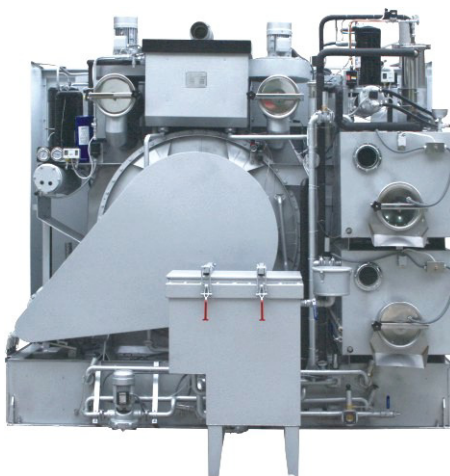



SEVE Degreasing Machines

	Unit	D11	D16	D20	D25	D30	D50	D80	D100
Capacity	kg	11	16	20	25	30	50	80	100
Volume	L	220	320	400	500	600	900	1400	1800
Washer Speed	rpm	34	34	34	34	34	28	28	28
Extraction Speed	rpm	370	370	370	370	370	370	370	370
Tanks	pcs	3	3	3	3	3	3	3	3
Machine Dimensions									
Depth	mm	1500	1550	1650	1750	1750	3000	3200	3400
Width	mm	1850	1950	2220	2270	2350	2600	2800	3000
Height	mm	2040	2200	2200	2300	2350	3200	2500	3500
Weight without Solvent	kg	950	1100	1500	1700	1900	3650	5000	5800
Power Requirement									
Electric Heated	kw	13.5	15.5	15.5	18.5	25	N/A	N/A	N/A
Supply Connections									
Compressed Air Flow	m ³ / min	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
Compressed Air Pressure	kg / cm ²	4 - 5	4 - 5	4 - 5	4 - 5	4 - 5	4.5	4 - 5	4 - 5
Compressed Air Fittings	mm	8	8	8	8	8	8	8	8
Steam Pressure	kg / cm ²	4 - 6	4 - 6	4 - 6	4 - 6	4 - 6	4 - 6	4 - 6	4 - 6
Steam Consumption	kg / hr	34	40	44	49	57	75	120	150
Steam Fittings	inch	2x1/2"	2x1/2"	2x1/2"	2x1/2"	2x1/2"	2x1/2"	2x1/2"	2x1/2"
Condensate Outlet	inch	2x1/2"	2x1/2"	2x1/2"	2x1/2"	2x1/2"	2x3/4"	2x3/4"	2x3/4"
Water Consumption	kg / hr	500	580	620	700	950	800	1100	1375
Water Pressure	kg / cm ²	2 - 3	2 - 3	2 - 3	2 - 3	2 - 3	2 - 3	2 - 3	2 - 3
Size of Fittings - Inlet/Outlet	inch	1 "	1 "	1 "	1 "	1 "	1 "	1 "	1 "
Electrical Requirement	V/Ph/Hz	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50

E & OE. Models and specifications subject to change without prior notice.

